

STRESSING/FORM TRAVELLER PUMPS



EPP®
Global Hydraulic Solutions



Reservoir Capacity:
80L
Flow at Rated Pressure:
3.4-5.4L/min
Maximum Operating Pressure:
400&700 BAR


Model No.	Horsepower (Hp)	Out Flow Rate (L/Min)	Working Pressure (kg/cm ²)	Volume (mm)	Oil Capacity (L)	Pressure Gauge	Weight (kg)
EPS-5	5	3.5	700	600X500X1000	120	4"X700kg/cm ² 2.5"X400kg/cm ²	220V X 60Hz
EPS-7	7.5	4.8	700	650X550X1200	150	4"X700kg/cm ² 2.5"X400kg/cm ²	220V X 60Hz
EPS-10	10	6.18	700	650X550X1300	180	4"X700kg/cm ² 2.5"X400kg/cm ²	220V X 60Hz
EPS-15	15	10.50	700	700X600X1500	230	4"X700kg/cm ² 2.5"X400kg/cm ²	220V X 60Hz



PE554T-A



PE554T-B

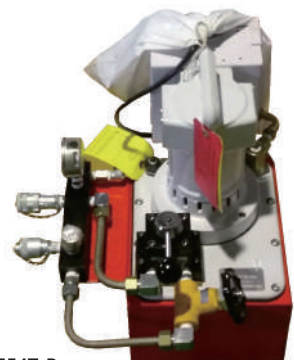

Model No.	Horsepower (Hp)	Out Flow Rate (L/Min)	Working Pressure (kg/cm ²)	Volume (mm)	Oil Capacity (L)	Pressure Gauge	Voltage
PE554T-A	1 1/8	11.5	700	356X241X178	9	4"X700kg/cm ²	110V X 50/60Hz 220V X 50/60Hz
PE554T-B	1 1/8	11.5	700	356X241X178	9	4"X700kg/cm ²	110V X 50/60Hz 220V X 50/60Hz